

- semi-intensive vegetation
- DIADEM® SIM intensive substrate
- DIADEM® VLF-200 filter geotextile
- DIADEM® DiaDrain-40H drainage board
- DIADEM® VLU-300 protection geotextile
- root-resistant waterproofing membrane
- thermal insulation
- DIADEM® FLW-400 vapour control layer
- additional layers


frost-proof pavement  
(with FK-5-UFO cross spacers)  
crushed stone bedding min. 3,0 cm

- DIADEM® DiaDrain-25H-DP drainage board filled
- DIADEM® VLU-300 protection geotextile (root-resistant) waterproofing membrane
- thermal insulation
- DIADEM® FLW-400 vapour control layer
- additional layers

■ DRS-Light railing system

RDL-30 light edging element

■ FK-5-UFO cross spacer

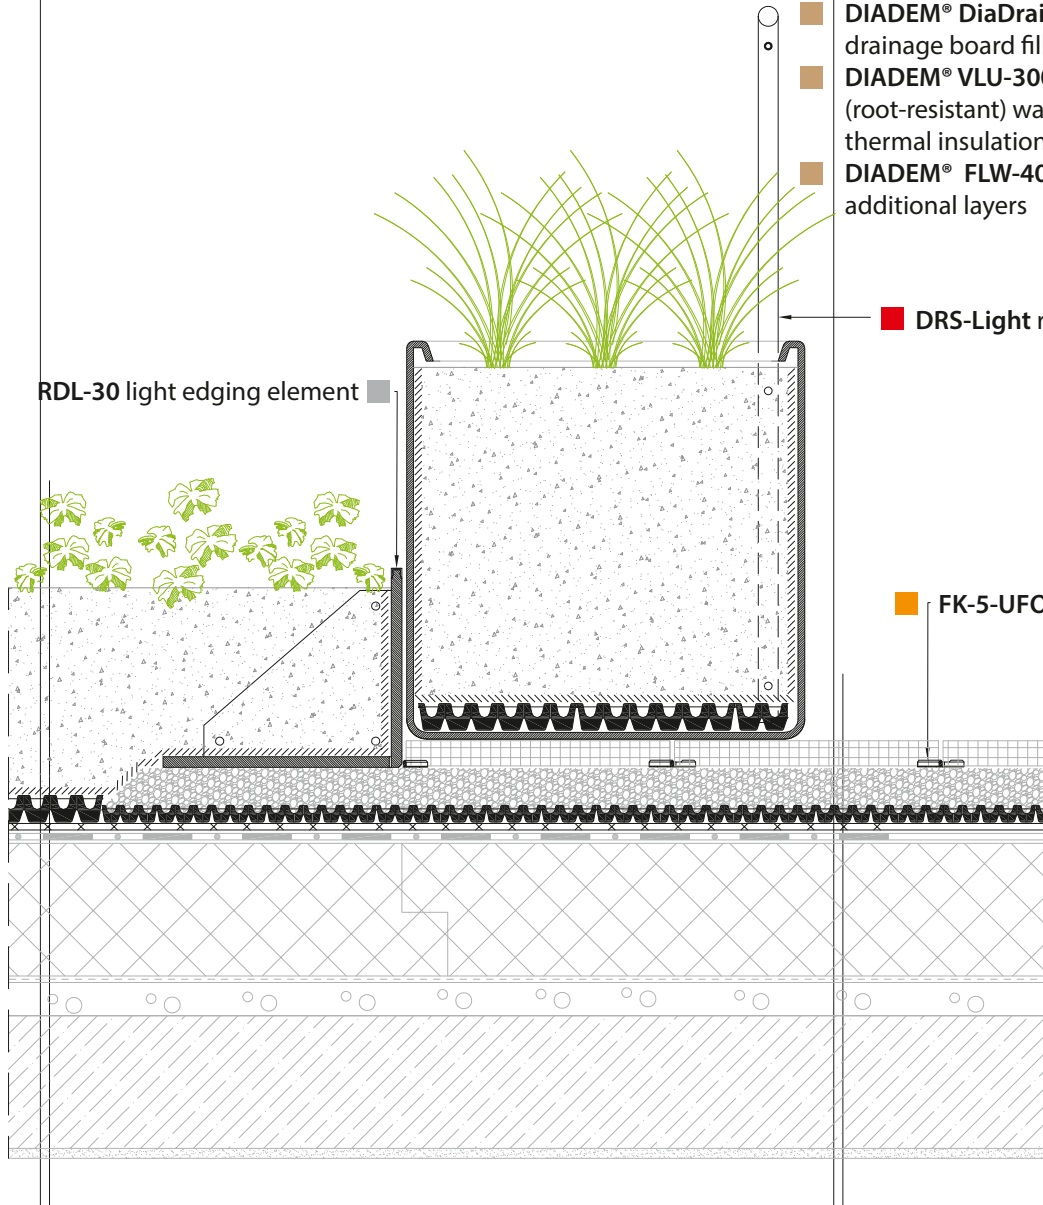

0 10 50 cm