

Step-proof lawn edging
164048

ADVANTAGES

- Durable and corrosion-free ⇒ galvanized according to the EN DIN1461:2009
- Mounting possible without bedding ⇒ into loose soil with rubberhead hammer, or into spade, if the soil is dense
- Free tracing ⇒ forming straight and curved edges are also possible
- Modern design ⇒ almost invisible separation
- Stable cladding-edge ⇒ long-lasting, step-proof edging solution between grass and cladding
- No unwanted displacement of the lawn edging ⇒ clever binding system for the succession of the elements with simple fixing by flat-headed wire pin



SPECIFICATION

Step-proof steel lawn edging with 2 mm thick visible upper edge and 1 mm material thickness, 17,5 cm height, and 2 m length, galvanizing layer according to the EN DIN 1461:2009, used for separating garden walkways, paved surfaces, lawn areas and flower beds, with integrated fastener, stabilized with D8 x 300 flat head wire pin, also possible to use bent or angled if needed; weight: 2.86 kg/piece; deliver and install in a professional manner.


Product: DIADEM® GG-FF-175
Producer's certificate: A.P.P. Kft.
Website: www.diadem.com

APPLICATION


The GG-FF-175 step-proof lawn edging offers a professional, aesthetic and durable solution for separating garden walkways, paved surfaces, lawn areas and flower beds. Forming straight and curved edges are also possible.

DIADEM® BUILD-UP


PAVED SURFACE

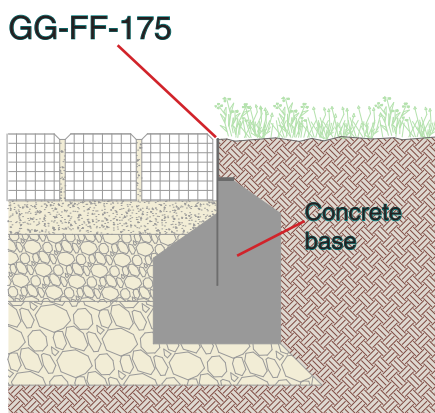

UNEVEN SURFACE

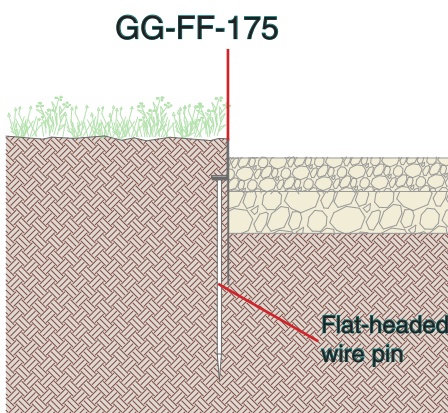

PLANTED SURFACE

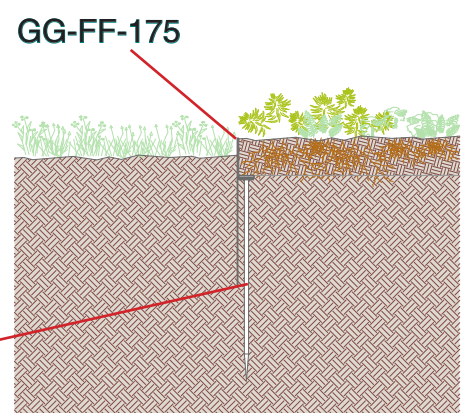

A.P.P. Kft.

Tel.: +36 96 512 910 • info@diadem.com • www.diadem.com/hu

APP Dachgarten GmbH


Tel.: +49 841 370 9496 • info@diadem.com • www.diadem.com/de

DIADEM CH AG.


Tel.: +41 79 516 20 62 • info@diadem.com • www.diadem.com




CREATING CORNERS

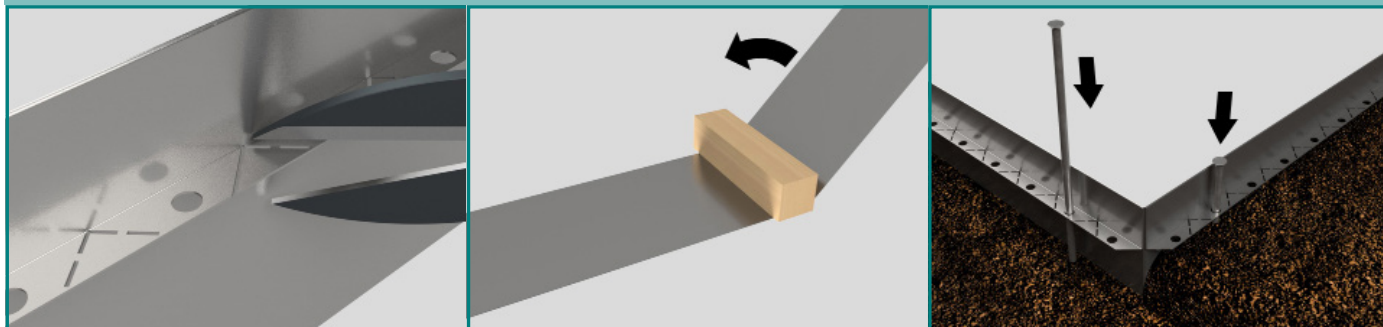

CREATING ARCS

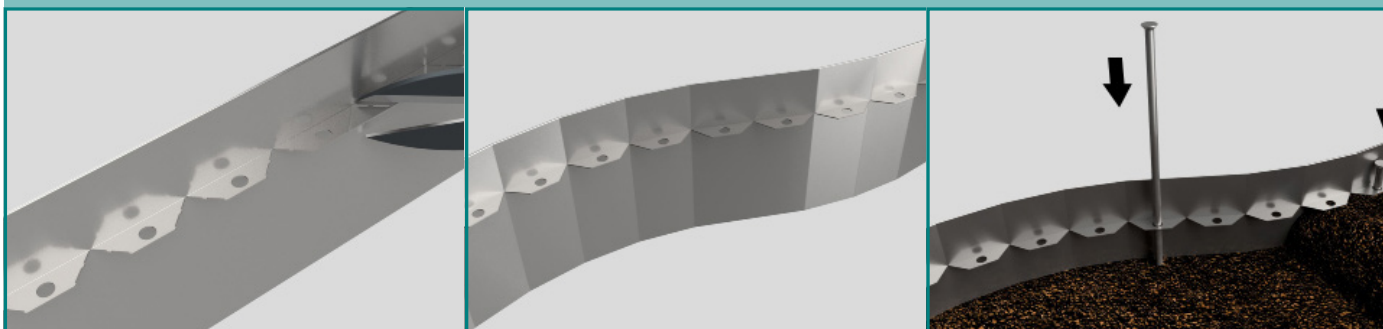


BINDING AND SUCCESSION

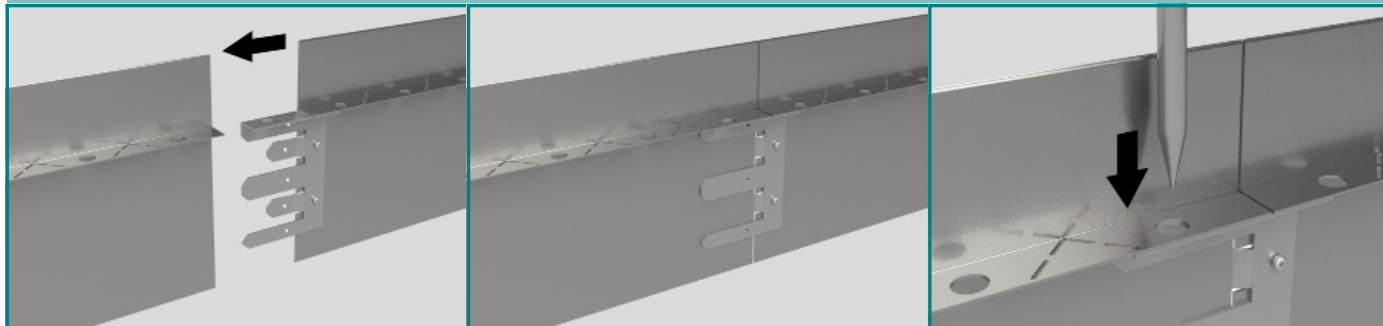

TECHNICAL DATA

Size (mm):	2000 x 19.5 x 175
Material:	hot dip galvanised steel (GG-FF-175)
Galvanizing quality:	DIN EN ISO 1461:2009 (ca. 55 micron)
Material thickness (mm):	1
Weight:	2.86 kg/pc (1 pc = 2 lm)
Visible upper edge (mm):	2
Possible arc radius (cm):	ca. 35
Anchoring spike (mm):	D8 x 300 flat-headed wire pin



A.P.P. Kft.

Tel.: +36 96 512 910 • info@diadem.com • www.diadem.com/hu

APP Dachgarten GmbH

Tel.: +49 841 370 9496 • info@diadem.com • www.diadem.com/de

DIADEM CH AG.

Tel.: +41 79 516 20 62 • info@diadem.com • www.diadem.com

