


- wooden deck
- batten
- **DIADEM® DiaTurtle**
height-adjustable terrace pedestal
- crushed stone bedding min. 3,0 cm
- **DIADEM® DiaDrain-120WM**
water flow and drainage board
- **DIADEM® VLS-500**
protection geotextile with moisture retention
root-resistant waterproofing membrane
thermal insulation
vapour control layer
additional layers

- intensive vegetation
- **DIADEM® SIM** intensive substrate
- **DIADEM® VLF-200** separation and filter geotextile
- **DIADEM® DiaDrain-40H** drainage board
- **DIADEM® VLF-200** separation and filter geotextile
- crushed stone bedding min. 3,0 cm
- **DIADEM® DiaDrain-120WM**
water flow and drainage board
- **DIADEM® VLS-500**
protection geotextile with moisture retention
root-resistant waterproofing membrane
thermal insulation
vapour control layer
additional layers

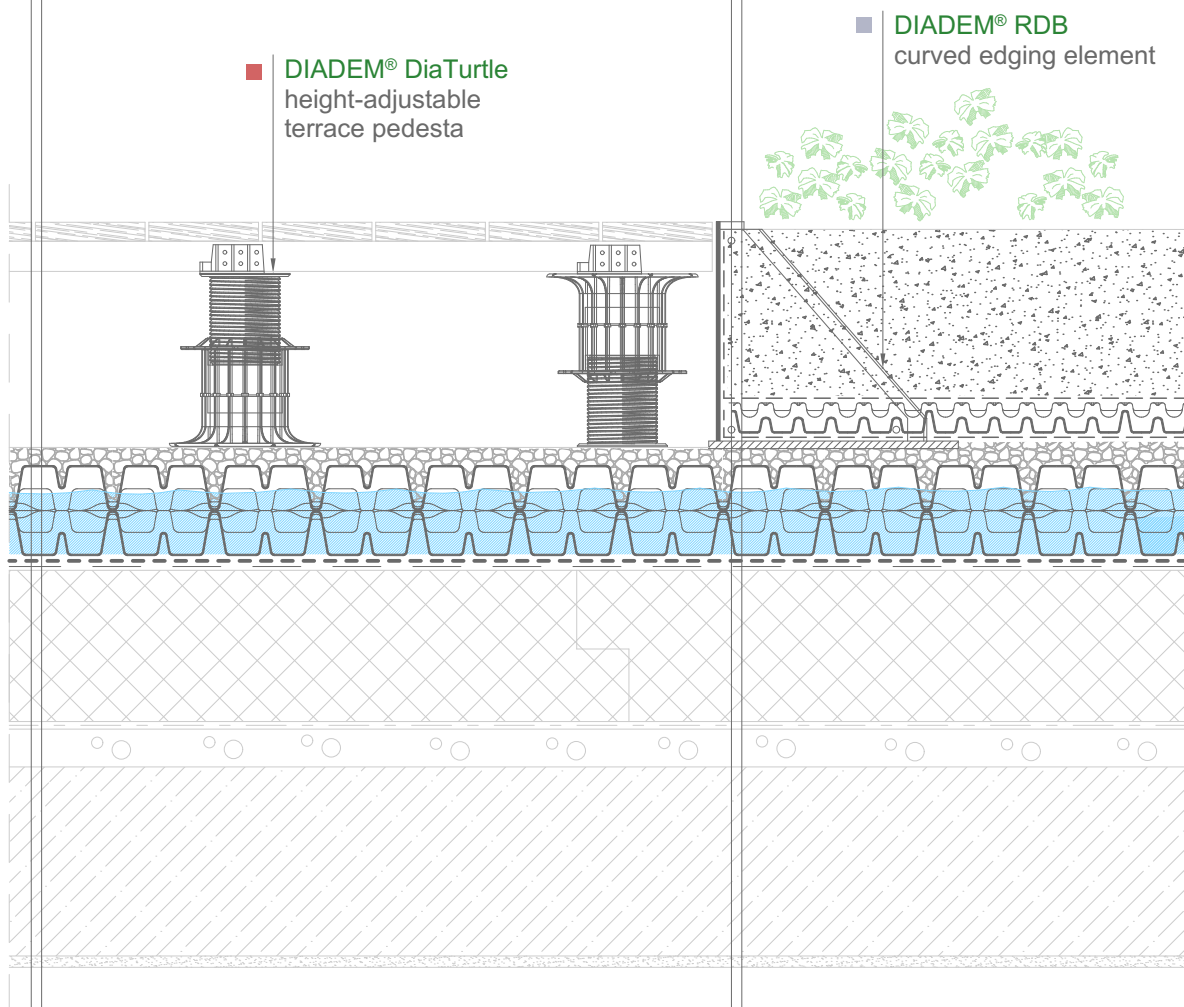

0 10 50 cm

The present drawing illustrates a possible detail version that is protected by copyright and its use is permitted only with the indication of the source. The structures should always be correctly dimensioned and conformed to the relevant specifications and regulations (structural, energetic, acoustic...etc.)



A.P.P. Kft.
Fehérvári út 75.
H-9028 Győr
+36 96 / 512 910
info@diadem.com
www.diadem.com

DIADEM 750®

flooded intensive green roof and terrace, warm roof
SWITCHING BETWEEN TERRACE AND
GREEN ROOF

date: 2025

drawing number:
750_06