


cobble stone pavement
bedding layer, min. 4,0 cm

leveled crushed stone bedding 4,0-5,0 cm

- **DIADEM® VLF-200** separation and filter geotextile
- crushed stone bedding, min. 10,0 cm
- **DIADEM® DiaMassive-25H** drainage board
- **DIADEM® VLU-300** mechanical protection geotextile
- **DIADEM® GF-1000** skid membrane in 2 lyrs.
- **DIADEM® VLU-500** mechanical protection geotextile
- root-resistant waterproofing membrane
- additional layers

■ **DIADEM® TGS-30**
traffic safe inspection box

■ **DIADEM® TRK-20-AL**
gravel guard

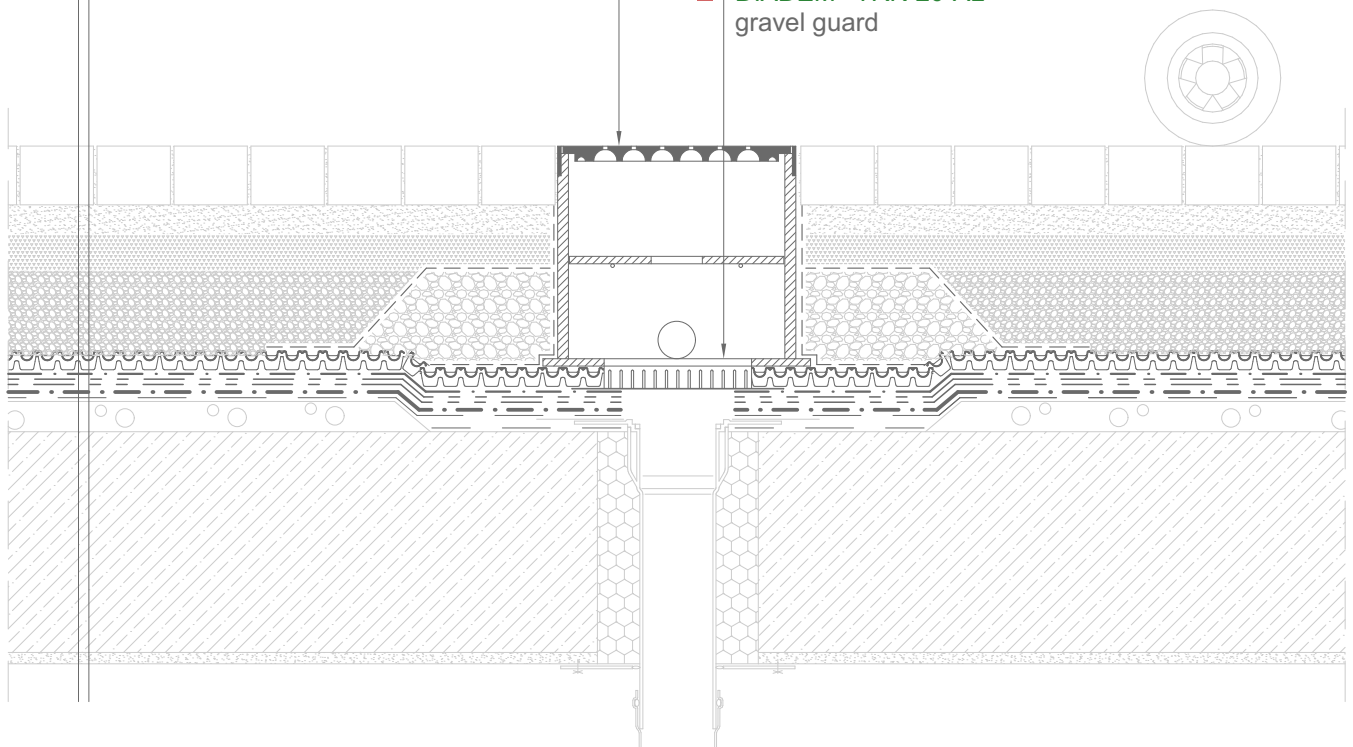

0 10 50 cm

The present drawing illustrates a possible detail version that is protected by copyright and its use is permitted only with the indication of the source. The structures should always be correctly dimensioned and conformed to the relevant specifications and regulations (structural, energetic, acoustic...etc.)



A.P.P. Kft.
Fehérvári út 75.
H-9028 Győr
+36 96 / 512 910
info@diadem.com
www.diadem.com

DIADEM 750®
paved roof for light vehicle traffic
OUTLET IN PAVED ROOF

date: 2025

drawing number:
750_13