


- frost-proof concrete tiles
- bedding layer, min. 4,0 cm
- **DIADEM® VLF-200** separation and filter geotextile
- crushed stone bedding, min. 10,0 cm
- **DIADEM® DiaMassive-25** drainage board
- **DIADEM® VLU-500** mechanical protection geotextile
- root-resistant waterproofing membrane
- additional layers



0 10 50 cm

The present drawing illustrates a possible detail version that is protected by copyright and its use is permitted only with the indication of the source. The structures should always be correctly dimensioned and conformed to the relevant specifications and regulations (structural, energetic, acoustic...etc.)

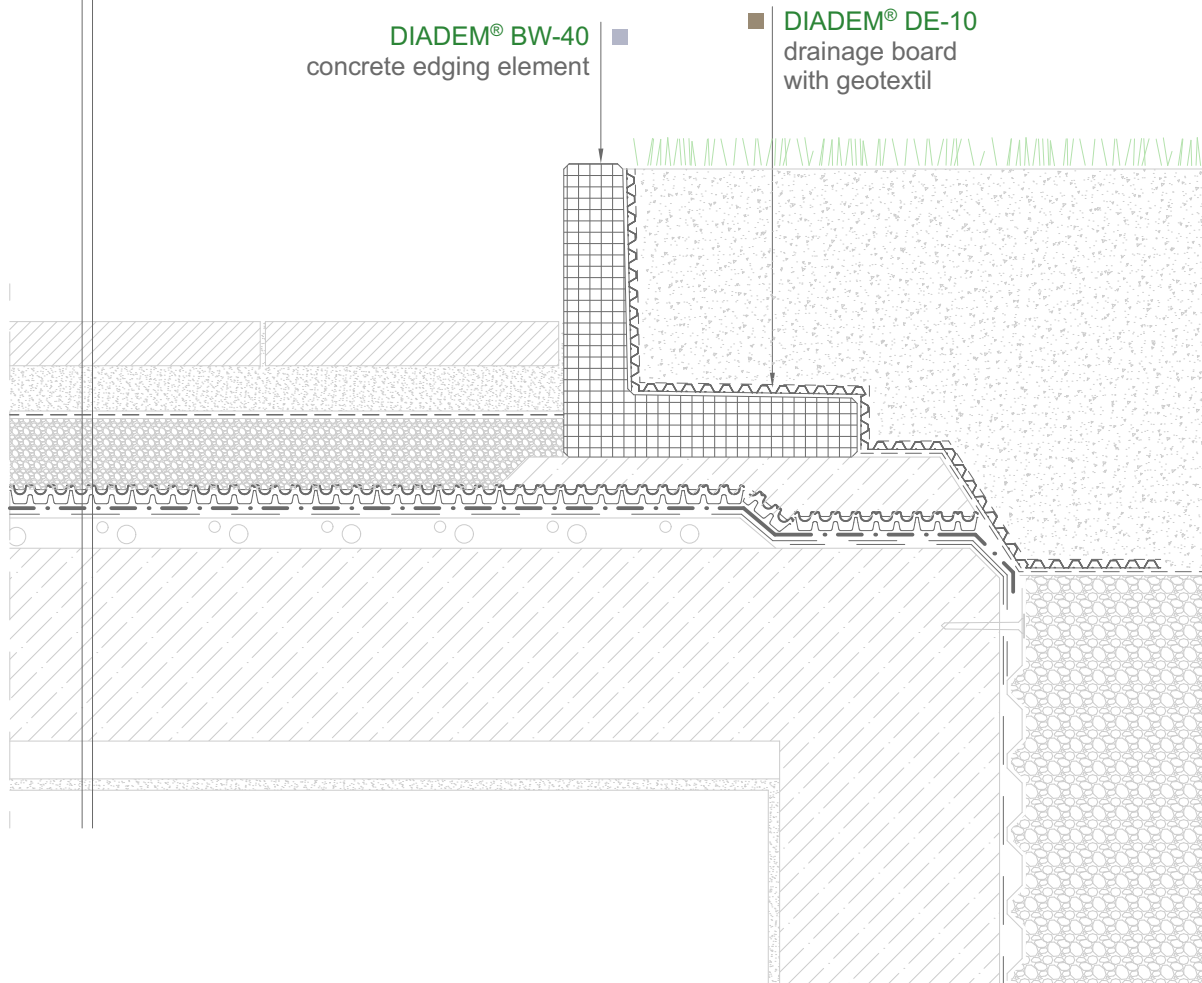

A.P.P. Kft.
 Fehérvári út 75.
 H-9028 Győr
 +36 96 / 512 910
 info@diadem.com
 www.diadem.com

DIADEM 750®
 paved roof for pedestrian traffic
 GARDEN CONNECTION

date: 2025

drawing number:
 750_15