

Concrete edging element




ADVANTAGES

- Economical, as it does not require concreting on site
- Quickly implementable, can be installed dry
- Timeless, stabile
- Also can be ordered in grey and anthracite for the perfect overall look



DIADEM® BUILD-UP

- coule gravel
- DiaDrain-40H drainage board
- VLU-300 mechanical protection geotextil
- root-resistant waterproofing membrane
- additional layers

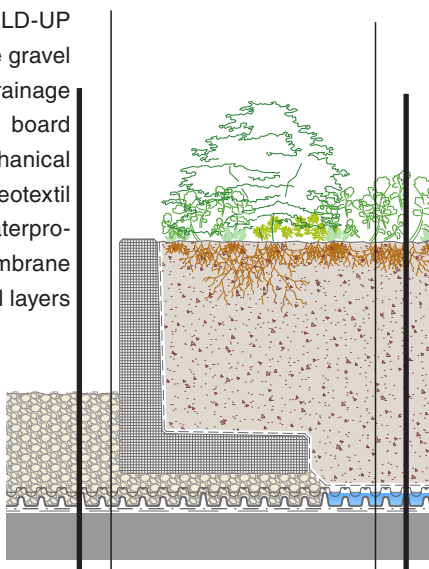

DIADEM® BUILD-UP

- semi-intensive vegetation
- intensive substrate
- VLF-200 separation and filter geotextile
- DiaDrain-40H drainage board
- VLU-300 mechanical protection geotextil
- root-resistant waterproofing membrane
- additional layers

APPLICATION

The BW type products are dry installable stemmed concrete edging elements, which can be used for buttressing, edging superstructures of different layer thickness, and also for the formal designing of the garden.

SPECIFICATION

Premanufactured intermediate and corner kerb elements made of frost-resistant concrete, available in various heights, for the clear demarcation of gardening areas and creation of green roofs. An optional self-adhesive joint sealing tape is available to prevent substrate washout. Material quality: C 20/25; surface: raw, exposed concrete; material requirement: 2.5 units per meter.

Product: DIADEM® BW
 Producer's certificate: A.P.P. Kft.
 Website: www.diadem.com

TECHNICAL DATA

	Product Nr.	Height (cm)	Length (cm)	Width (cm)	Thickness (cm)	Weight (kg)
BW-30	161002	30 / 20	40	20 / 30	6-9	29
BW-30-AE	161008	30	40	40	6-9	45
BW-40	161006	40	40	40	8-10	55
BW-40-AE	161012	40	40	40	8-10	75
BW-50	161013	50 ± 0,5	40 ± 0,5	40 ± 0,5	8-10	64
BW-50-AE	161015	50	40	40	8-10	85
BW-60	161003	60 ± 0,5	40 ± 0,5	40 ± 0,5	8-10	72
BW-60-AE	161014	60	40	40	8-10	95
BW-80	161004	80 ± 0,5	40 ± 0,5	40 ± 0,5	10	96
BW-80-AE	161016	80	40	40	10	127
BW-100	161005	100 ± 0,5	40 ± 0,5	50 ± 0,5	10	126
BW-100-AE	161017	100	40	50	10	170



A.P.P. Kft.

Tel.: +36 96 512 910 • info@diadem.com • www.diadem.com/hu

APP Dachgarten GmbH

Tel.: +49 841 370 9496 • info@diadem.com • www.diadem.com/de

DIADEM CH AG.

Tel.: +41 79 516 20 62 • info@diadem.com • www.diadem.com

