


DiaDrain-40H-DeReT

Drainage board perforated on both sides
310240



ADVANTAGES

- Lower and upper openings for water drainage ⇒ fast water drainage of excess storage water
- Very good drainage ⇒ properties unhindered water drainage between retention element and sealing membrane
- Negligible overlap loss ⇒ economical installation
- Increased contact area ⇒ decreased surface pressure

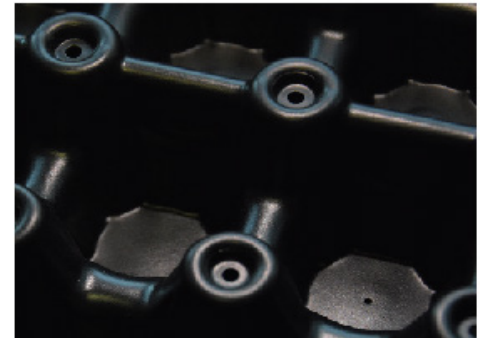

APPLICATION

Drainage panel with flow retardation and residual water storage made of recycled, impact-resistant polystyrene, 40 mm high, graduated barrier shape, with recessed evaporation openings, with drainage openings at the bottom and with water channel system at the bottom.




EN 13252



100% recyclable

microbiological resistance

EN 12225

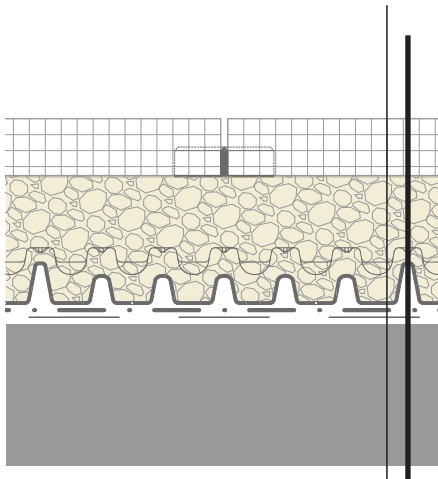

DIADEM® BUILD-UP

- DiaMat^{PRO} sedum mat
- extensive substrat
- VLF-150 separation and filter geotextile
- DiaDrain-40H-DeReT perforated drainage board
- VLU-300 mechanical protection geotextile
- root-resistant waterproofing membrane
- additional layer

SPECIFICATION

Drainage board, perforated on both sides, made of high-impact polystyrene, height 40 mm, with lower and upper drainage openings of paved/wooden surfaces of roof areas and for gravel roof build-up. Water flow capacity at 2% roof slope is 1,03 l/mxs certified according to EN ISO 12958, microbiological resistance tested (EN 12225).

Product: DIADEM® DiaDrain-40H-DeReT
Producer's certificate: A.P.P. Kft.
Website: www.diadem.com

TECHNICAL DATA

Board size (mm):	2040 × 1040 × 40
Overlap loss:	~5%
Fill-up volume (l / m ²):	22.75
Weight (kg / m ²):	1.96
Compressive strength unfilled (kN / m):	230 (± 10%)
Material:	recycled high-impact polystyrene (HIPS)
Water flow capacity EN ISO 12958 (l / m ² s):	at 1%: 0.72 • at 2%: 1.03 • at 3%: 1.25 • at 5%: 1.69 (± 5%)
Storage:	horizontally, for long-term storage protect from UV radiation
Installation:	adjacent to each other or overlapped



A.P.P. Kft.

Tel.: +36 96 512 910 • info@diadem.com • www.diadem.com/hu

APP Dachgarten GmbH

Tel.: +49 841 370 9496 • info@diadem.com • www.diadem.com/de

DIADEM CH AG.

Tel.: +41 79 516 20 62 • info@diadem.com • www.diadem.com

